



GS7/E - Lincat Silverlink 600 Electric Counter-top Griddle - Extra Power - W 750 mm - 7.0 kW

Whether you're cooking eggs, bacon, burgers or vegetables, the versatile Silverlink 600 Electric Griddle won't let you down.

- ✓ Extra powered element for maximum output for a busy kitchen
- ✓ Two separately controlled heat zones give you the option of operating either zone independently to provide a smaller cooking area during quiet periods as well as offering versatility when cooking two separate meals simultaneously
- ✓ 12 mm thick machined steel plate providing even heat distribution and an easy to clean surface
- ✓ The plate is fully welded into the frame to prevent leaks and places where food and carbon can build up
- ✓ 2 cooking zone to give maximum flexibility during service
- ✓ Thermostatically controlled to give accurate temperatures during the cooking process for consistent results
- ✓ Front mounted control for easy of use during cooking

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Brand | Lincat |
| Range | Silverlink 600 |
| Power Type | Electric |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN | 5056105104919 |

Power and Performance

| | |
|--|------------|
| Total Power kW | 7.0 |
| Temperature Range °C | 50-250 |
| IP Rating | IP33 |
| Cooking Area (Width x Depth) mm | 712 x 405 |
| Temperature Control | Mechanical |

Key Specifications

| | |
|---------------------------------|--------|
| Number of Heat Zones | 2 |
| Grill Plate Surface Type | Smooth |
| Grill Plate Material | Steel |

Capacity

| | |
|--------------------------------|---|
| Product Output per Hour | 190 x 115g [4oz] burgers [frozen], 140 x 225g [8oz] |
|--------------------------------|---|

Weights and Dimensions

| | |
|----------------------------------|------|
| Unit Height (External) mm | 330 |
| Unit Width (External) mm | 750 |
| Unit Depth (External) mm | 620 |
| Net Weight Kg | 49.7 |

Supply Connections

| | |
|---------------------------------------|---------------------------|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 7,000 |
| Single Phase Amps | 30.4 |
| Single Phase Voltage | 230 |
| Three Phase Amps | L1=10.1; L2=10.1; L3=10.1 |
| Three Phase Voltage | 400 |




Shipping

| | |
|-------------------------|------|
| Packed Weight Kg | 67.4 |
| Packed Height cm | 63.5 |
| Packed Width cm | 85.5 |
| Packed Depth cm | 70 |

Available Accessories

| | |
|-------------|--|
| CC7 | Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 750 mm |
| CN7 | Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 750 mm |
| HC7 | Lincat Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 750 mm - 0.5 kW |
| HCL7 | Lincat Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 750 mm - 0.75 kW |
| SB7 | 750 GRIDDLE SPLASHB |
| SLS7 | Lincat Silverlink 600 Free-standing Floor Stand - for units W 750 mm |

Technical Picture

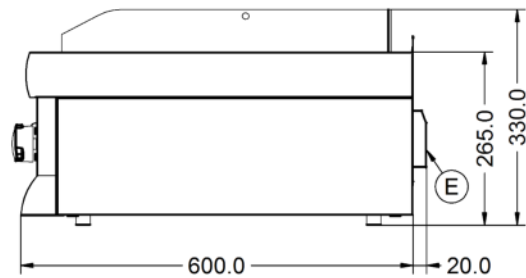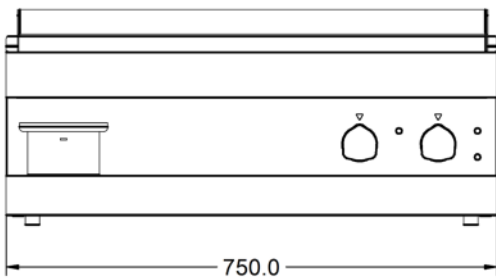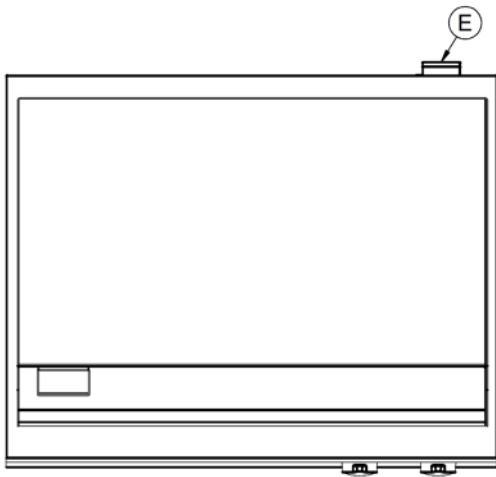



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm