ECOMAX PLUS SERIES


HOOD TYPE







ECOMAX (HOBART UK) SOUTHGATE WAY, ORTON SOUTHGATE, PETERBOROUGH. PE2 6GN

TEL: 0870 168 8881 www.hobartindependent.co.uk

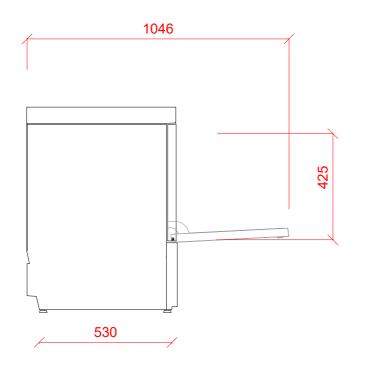





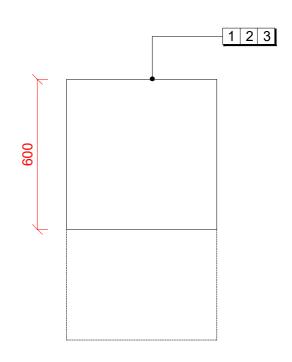

22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION. WATER SUPPLY 10°C TO 60°C @ 0.6 TO 10.0 BAR MAX. INITIAL TANK FILL 10.8 LITRES. RINSE WATER USAGE 2.5 LITRES PER CYCLE. MAX USAGE 100 LITRES PER HOUR. OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 750mm MAX A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE APPROX WEIGHTS:

DETERGENT HOSE - 2.5 METRE FLEXIBLE

5.6kW 230/50/1 FUSED AT 25AMPS.

CONFIGURABLE TO:

7.7kW 400/50/3 + N + E FUSED AT 16AMPS/PHASE MACHINE SUPPLIED WITH 2.5 METRES OF CABLE.

EMPTY: 65kg's WITH WATER: 87kg's

PLOT SCALE: 1:15