




Side Elevation
(Ventilation Space)

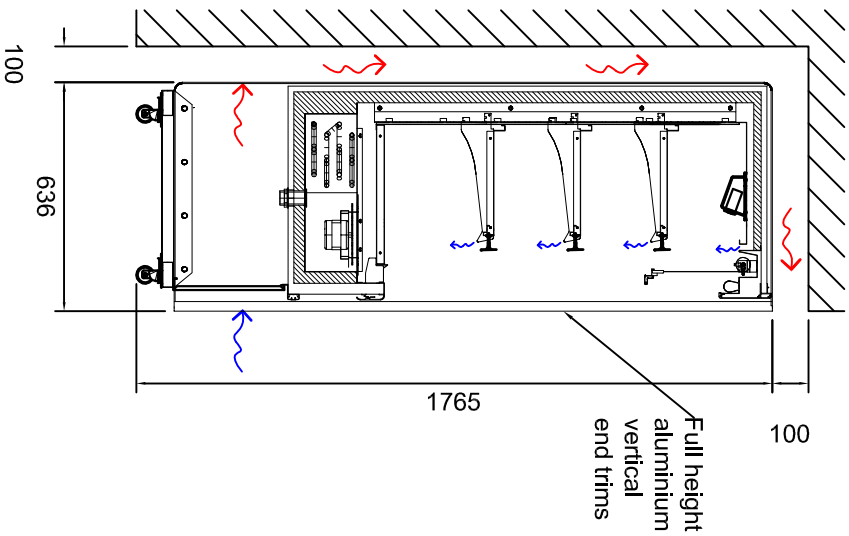

Side Elevation
(Shelving Heights)

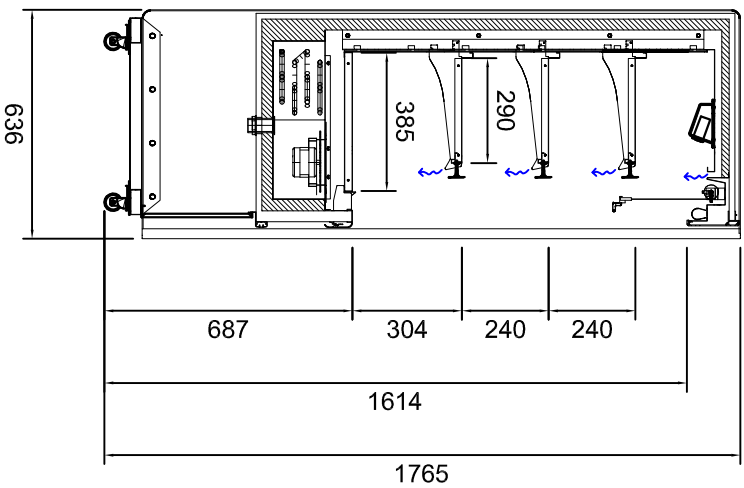

Front Elevation

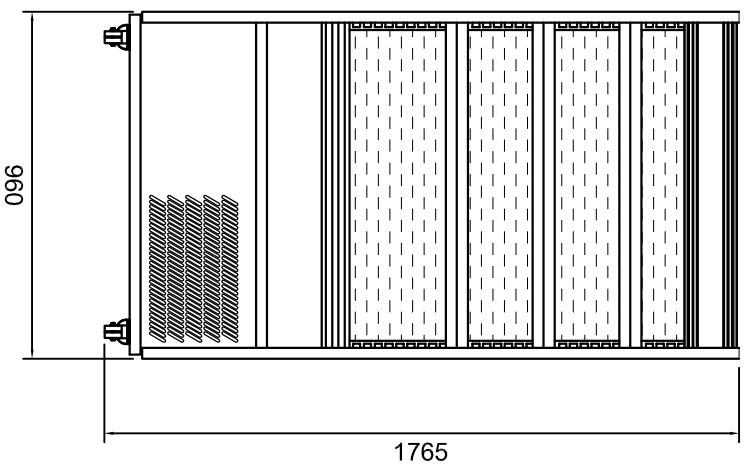

WILLIAMS REFRIGERATION RETAIN COPYRIGHT ON THIS DRAWING.
DO NOT SCALE FROM DRAWING. USE MARKED DIMENSIONS.
WILLIAMS REFRIGERATION ARE TO BE NOTIFIED OF ANY DISCREPANCIES IMMEDIATELY.

Multideck requires a minimum ventilation void of 100mm behind and above unit for heat to escape.

Electrical supply: 1 Phase
13amp UK standard plug top

Multideck Features	
☒ W	White Finish
☒ S	Mirror Stainless Finish
☒ C	Castors
☒ F	Feet (For Remote Units Only)
☒ N	Nightblind
☒ S	Security Shutter
☒ RE	Remote Refrigeration Unit
Only checked features are included	

Multideck Options	
☐ SH	Additional Shelf
☐ SNB	Snack Basket (Hook On)
☐ TS	Tray Slide
☐ SRD	Solid Rear Loading Doors
☐ GRD	Glass Rear Loading Doors
☐ MT	Meat Temperature
☐ RAL	Coloured Finish (RAL)
☐ AV	Alternative Voltage
Only checked options are included	

Maximum operating ambient temperature +25 deg.c.
(climate class 3).

Manufacturing dimensional tolerance +/- 3mm.



williams

Williams Refrigeration Southern
44, The Valley Way
Kent, TN12 9BE

T: +44 (0) 1892 835525
F: +44 (0) 1892 835526
E: estimating@williams-southern.co.uk

Client: **Standard Product**

Project: **Standard Product**

Title: **R100-WCN R1 - R Series Multideck
Nightblind Model
White Finish**

Drawn By: **PPR**

DWG No: **R100-WCN R1**

Date: **01/07/17**

REV: **A**