

TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, United Kingdom • www.truemfg.com • Tel 01709 888 080 • Fax 01709 880 838 • Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928 Project Name: ____

| Location: | |
|-----------|--|
| Item #: | |

Model #:

| <i>Qty:</i> | SIS |
|-------------|-----|
| | |

AIA #

#

Model: TUC-60D-2 **Undercounter:** Drawered Refrigerator



TUC-60D-2

- True's undercounter units are designed with enduring quality that protects your long term investment.
- Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- Oversized, environmentally friendly (134A) forced-air refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- All stainless steel front, top and ends. Matching aluminum finished back.
- Front breathing.
- Each drawer accommodates one (1) full size 12"L x 20"W x 6"D (305 mm x 508 mm x 153 mm) food pan (sold separately).
- Heavy duty PVC coated wire shelves.
- Foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next $\frac{1}{2}$ ").

| | | | | Cabinet Dimensions (mm) | | | | | | NEMA | Cord Length | Crated Weight |
|-----------|-------|---------|---------|----------------------------|-----|-----|-----|--------------|------|---------|----------------|------------------|
| Model | Doors | Drawers | Shelves | L | D | Н | ΗP | Voltage | Amps | Config. | (total m) | (kg) |
| TUC-60D-2 | 1 | 2 | 2 | 1534 | 766 | 839 | 1⁄3 | 230-240/50/1 | 4.2 | | 2.13 | 173 |

 \blacksquare Plug type varies by country.

| | APPROVALS: | AVAILABLE AT: |
|-------------------|------------|---------------|
| | | |
| 5/10 Printed in U | J.S.A. | |

Model:

TUC-60D-2

Undercounter: Drawered Refrigerator



STANDARD FEATURES

DESIGN

True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform product temperatures.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True undercounter units a more efficient, low velocity, high volume airflow design. This unique design ensures faster temperature recovery and shorter run times in the busiest of food service environments.
- Condensing unit access in back of cabinet, slides out for easy maintenance.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and ends. Matching aluminum finished back.
- Interior attractive, NSF approved, white aluminum liner. 300 series stainless steel floor with coved corners
- Insulation entire cabinet structure, solid door, and drawer facings are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

PLAN VIEW

Cubic Feet/Liters 15.5/439 * Based on ANSI/AHAM HRF-1-2004

DOOR / DRAWERS

- Door constructed of stainless steel exterior with white aluminum liner to match cabinet interior. Drawers have stainless steel exterior facings and liners with stainless steel frames.
- Each door and drawer fitted with 12" (305 mm) long recessed handle that is foamed-inplace with a sheet metal interlock to ensure permanent attachment.
- Door section positive seal self-closing door(s) with 90°stay open feature. Door(s) swing within cabinet dimensions.
- Magnetic drawer/door gaskets of one piece construction, removable without tools for ease of cleaning.
- Door or drawer assemblies can be located in any secion of the cabinet. Location of door/drawers must be indicated at time of ordering.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Each drawer accommodates one (1) full size 12"L x 20"W x 6"D (305 mm x 508 mm x 153 mm) food pan (sold separately). Drawer will support varying size pan configurations with pan divider bars (drawer pans and divider bars optional).

SHELVING

- Four (4) adjustable, heavy duty PVC coated wire shelves 27 1/2 "L x 16"D (699 mm x 407 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

MODEL FEATURES


- Evaporator is epoxy coated to eliminate the potential of corrosion.
- NSF-7 compliant for open food product.


ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 230-240/50/1 phase dedicated outlet.
- Plug type varies by country.

OPTIONAL FEATURES/ACCESSORIES Upcharge and lead times may apply.

- G" (153 mm) standard legs.
- □ 6" (153 mm) seismic/flanged legs.
- □ 2½" (64 mm) diameter castors.
- Barrel lock available for door section (factory installed).
- □ Single overshelf.
- Double overshelf.
- □ 30" (762 mm) deep, ½" (13 mm) thick, white polyethylene cutting board. Requires "L" brackets.
- □ 30" (762 mm) deep, ½" (13 mm) thick, composite cutting board. Requires "L" brackets. Heavy duty, 16 gauge tops.
- Exterior rectangular digital temperature display (factory installed).
- ADA compliant models with 34" (864 mm) work surface height.
- Low profile models with 31%" (810 mm) work surface height.
- Remote cabinets (condensing unit supplied by others; system comes standard with 404A expansion valve and requires R404A refrigerant). Consult factory technical service department for BTU information. All remote units must be hard wired during installation.

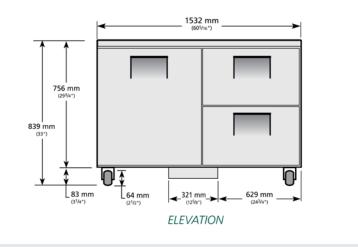



| METRIC DIMENSIONS ROUNDED UP TO THE | | | | | | | |
|-------------------------------------|-----|-----------|-----------|---------|----------|----------|------|
| NEAREST WHOLE MILLIMETER | | Model | Elevation | Right | Plan | 3D | Back |
| SPECIFICATIONS SUBJECT TO CHANGE | KCL | TUC-60D-2 | TFQY127E | TFQY03S | TFQY127P | TFQY1273 | |

TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, United Kingdom • 01709 888 080 • Fax 01709 880 838 • Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928 • www.truemfg.com