

FilterFlow Automatic Water Boilers

Key Features

- Type: Electric
- Push button timed dispense
- Three programmable volumes
- Push and hold or timed dispense modes
- Built-in filtration cartridge
- Electronic control system
- Adjustable temperature (70 – 96°C)
- Standby mode
- Advanced diagnostics
- LCD information panel
- Supplied with removable drip tray and water feed hose (1m)
- WRAS approved



Construction

- Body: stainless steel grade 430
- Internal tank: stainless steel grade 304
- Trim: Black ABS Plastic

Available Options






Available Accessories

- BR49 Wall mounting kit
- FC02 Replacement filter cartridge

Specifications

Model	EB3F/PBM
External height (mm)	652
External width (mm)	290
External depth (mm)	465
Output per hour (litres)	31
Rapid Draw-off (litres)	9
Recovery per minute (litres)	0.52
Net weight (unpacked) kg	13
Gross weight (packed) kg	15
Shipping volume (m ³)	0.159
Water inlet connection	¾" BSP male
Water inlet pressure (bar)	1 to 8
Total power rating (kW)	3
Standby power consumption (kW)	0.1
Electrical supply 1N~ +E 230V 50-60Hz Current Rating (A)	13
Electrical supply 3N~ +E 400V 50-60Hz Current Rating (A)	N/A

EB3F/PB

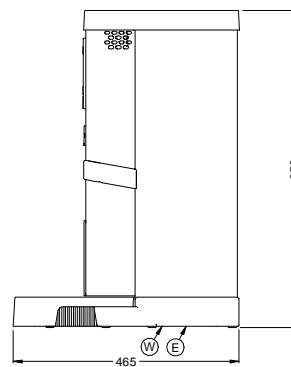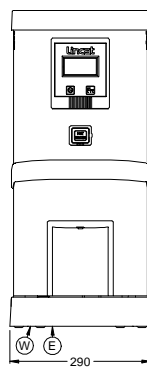

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
FILTERFLOWMETERED
Issue date: Jul-14