



DISHWASHER P-100B 400/50/3 DD (WITH DRAIN PUMP)

2.5 kW wash tank and 6 kW boiler

P/N 1302205



FEATURES AND BENEFITS

- ✓ A hood type dishwasher for both straight in line and corner situations -suitable for washing trays, as well as all types of plates, cups, glasses and cutlery.
- ✓ Professional washing with double system of rotating wash and rinse arms top and bottom.
- ✓ Hood operated, auto cycle start.
- ✓ Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- ✓ The inside of the machine features rounded corners, the elimination of angles avoiding the accumulation of dirt.
- ✓ Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- ✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.
- ✓ A magnetic micro-switch stops the wash cycle, in the event of the hood being raised prematurely.
- ✓ Standard features include adjustable feet for levelling.
- ✓ A stainless steel, top of tank filter system is also included as standard.
- ✓ Rinse aid dosing equipment.
- ✓ Adjustable washing tank and boiler temperature and security in the boiler.
- ✓ Thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.
- ✓ Sammic ware washers are designed for easy and fast on-site maintenance.
- ✓ 100% tested.

INCLUDES

- ✓ Detergent dosing equipment.
- ✓ Rinse aid pump.
- ✓ Version with drain pump and non-return valve available.
- ✓ 1 open basket.
- ✓ 1 mixed basket.
- ✓ 1 cutlery basket.

SALES DESCRIPTION

Commercial pass-through dishwasher with a max. loading height of up to 400 mm and 3 wash cycles with thermal cycle delay option included.

- ✓ User-friendly.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- ✓ Thermal lock guarantees a correct sanitization.



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

WARE WASHING
PASS-THROUGH DISHWASHERS

product sheet
updated 07/05/2018



DISHWASHER P-100B 400/50/3 DD (WITH DRAIN PUMP)

2.5 kW wash tank and 6 kW boiler



P/N 1302205

SPECIFICATIONS

- Basket dimensions: 500 mm x 500 mm
- Maximum glass height: 400 mm
- Cycles: 3
- Cycle duration: 120 " / 180 " / 210 "
- Production baskets/hour: 30 / 20 / 17
- ✓ Boiler capacity: 10 l
- ✓ Wash tank capacity: 40 l
- ✓ Water consumption/cycle: 3.5 l
- ✓ Electrical supply: 400 V / 50 Hz / 3 ~ (19 A - 12.6 A)
- ✓ Plug: -

Loading

- ✓ Pump: 750 W / 1 Hp
- ✓ Tank: 2500 W
- ✓ Boiler: 6000 W
- ✓ Total loading: 6750 W
- ✓

External dimensions (WxDxH)



- ✓ Width: 640 mm
- ✓ Depth: 756 mm
- ✓ Height: 1920 mm / 1468 mm

Net weight: 108,4 Kg

Crated dimensions

760 x 860 x 1470 mm

Gross weight: 119.5 Kg.

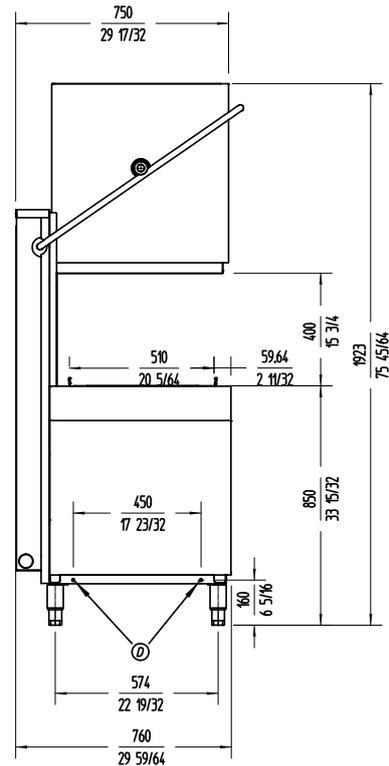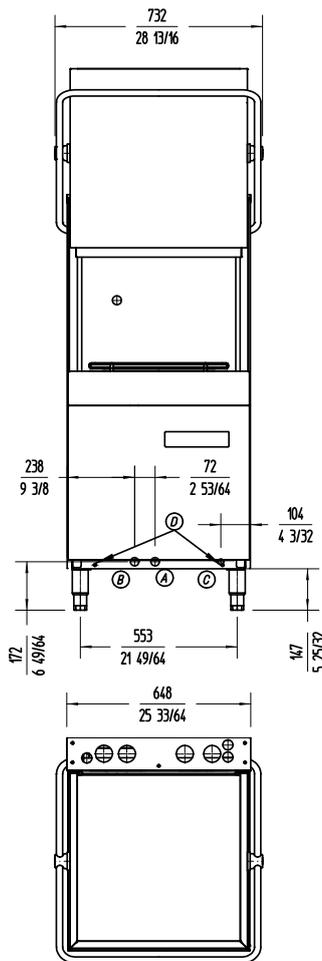

ACCESSORIES

- Filters for dishwashers
- Dosing equipments
- Tables for dishwashers P/X/S (pass-through model)
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- High Feet Kit

WARE WASHING
PASS-THROUGH DISHWASHERS



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 07/05/2018