

E1808, E1838 and E1848 ELECTRIC CHIEFTAIN FRYERS



E1838 fryer

MODELS and ACCESSORIES

E1808 single pan, single basket fryer

E1838 single pan, twin basket fryer

E1848 twin pan, single basket (*per pan*) fryer

- Side screen
- Hob capper
- Factory fitted castors

KEY FEATURES

- Accurate temperature control and recovery
 - *efficient high yield performance*
- Supplied with lid as standard
 - *protects and extends life of oil*
- Sediment collection zone
 - *keeps oil clean for longer*
- Rotating tubular elements
 - *provides easy access for maintenance and cleaning*
- Removable pan strainer
 - *collects debris during operation to ease cleaning*
- All stainless steel finish (*interior and exterior*)
 - *easy to clean*
- Available on castors
 - *specify at time of order*

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.


A clearance of 150mm between appliance and any combustible wall and a minimum vertical clearance of 1220mm above the top edge of flue should be observed.





E1808, E1838 and E1848 ELECTRIC CHIEFTAIN FRYERS

MODEL DIMENSIONS (in mm)

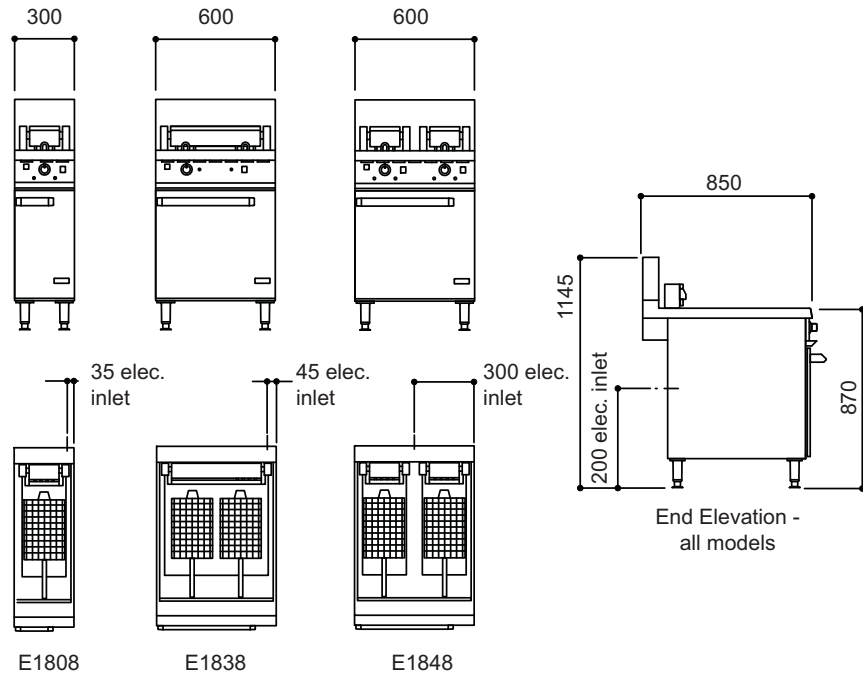

SPECIFICATION DETAILS

	E1808	E1838	E1848
Oil capacity (litres)	19	39	2 x 19
Electrical rating (kW)	9.6	19.2	19.2
Electrical supply voltage	400V 2N~	400V 3N~	400V 2N~
Amps per phase (A)	L1: 20.42, L2: 20.42	L1: 32.7, L2: 32.7, L3: 16.35	L1: 40.85, L2: 40.85
Required electrical supply (A)	32 (three phase)	63 (three phase)	63 (three phase)
Hourly chip output (kg)*	27	54	2 x 27
Basket size (w x d x h - mm)	200 x 290 x 140	200 x 290 x 140 (x 2)	200 x 290 x 140 (x 2)
Weight (kg)	51	78	100
Packed weight (kg)	59	88	108

* pre-blanching, chilled, 10mm size