

Opus 700 Clam Griddle

Key Features

- Type: Electric
- Independently controlled cooking zones
- Thermostatic control from 50 - 250°C (flat plates) and 50 - 300°C (ribbed plates)
- Independent digital timer on each clam top
- Large fat collection drawer
- Wide fat drainage hole
- Supplied with scraper
- Supplied with a PTFE non-stick sheet on each clam plate



OE7210

Construction

- Griddle plate: 15mm machined stainless plate
- Clam plate: 12mm hard anodised aluminium
- Body: stainless steel grade 430

Available Options


- Single phase OE7211 units available upon request

Available Accessories

- OA7921 – Floor stand for OE7211
- OA7956 – Floor stand for OE7210
- TFS01 – PTFE non-stick sheet
- OA7960 – Height adjuster 3 positions

Specifications

Model	OE7210	OE7210/R	OE7210/FR	OE7211	OE7211/R
External height (mm)	544	544	544	544	544
External width (mm)	800	800	800	400	400
External depth (mm)	737	737	737	737	737
Griddle plate cooking area – w x d (mm)	760 x 575	760 x 575	760 x 575	360 x 575	360 x 575
Clam plate cooking area – w x d (mm)	330 x 500	330 x 500	330 x 500	330 x 500	330 x 500
Clam plate surface (type)	Flat	1 x Flat / 1 x Ribbed	Ribbed	Flat	Ribbed
Base Cooking surface (type)	Flat	Flat	Flat	Flat	Flat
Net weight unpacked (kg)	145	145	145	73	73
Gross weight packed (kg)	158	158	158	81	81
Shipping volume (m ³)	0.560	0.560	0.560	0.267	0.267
Total electrical power rating (kW)	17.2	17.2	17.2	8.6	8.6
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	N/A	N/A	N/A	N/A	N/A
Electrical supply 3N~+E 400V 50-60Hz Current Rating (A)	L1 - 28.0 L2 - 28.0 L3 - 18.0	L1 - 28.0 L2 - 28.0 L3 - 18.0	L1 - 28.0 L2 - 28.0 L3 - 18.0	L1 - 10.8 L2 - 21.6 L3 - 10.8	L1 - 10.8 L2 - 21.6 L3 - 10.8

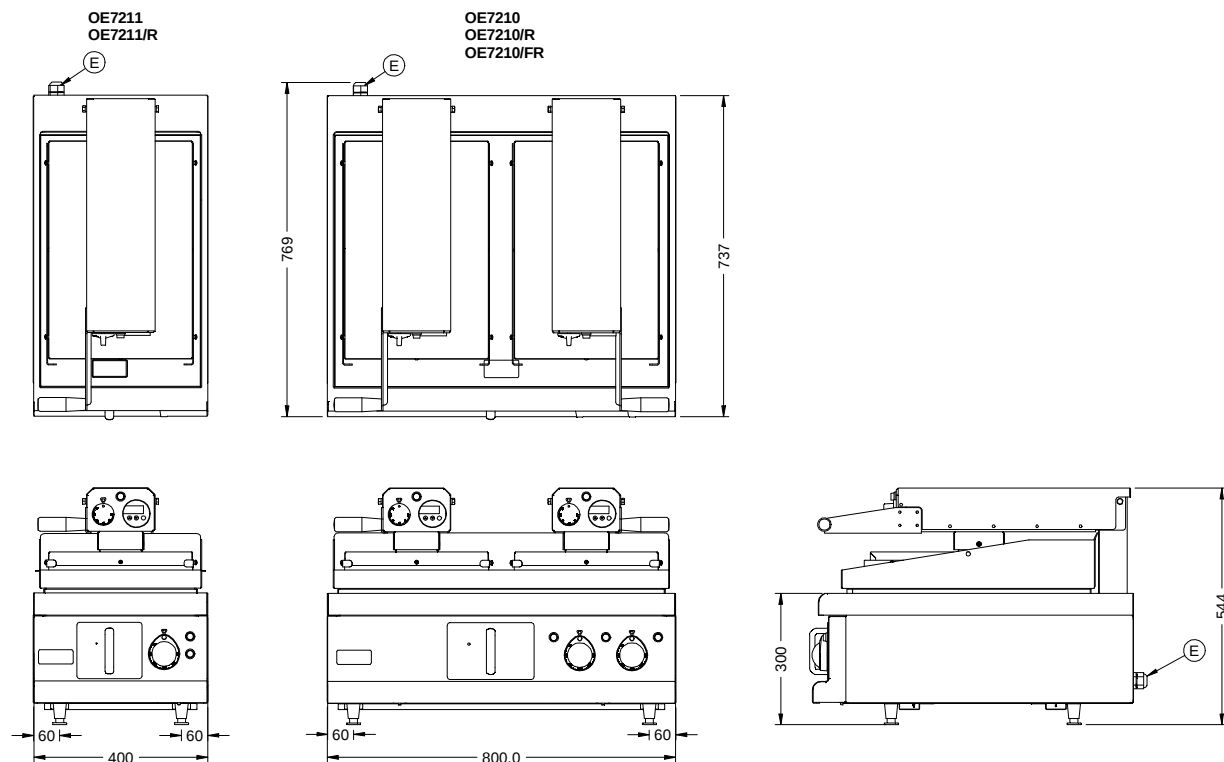

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
OPUSELECCLAM
Issue date: JUNE-15