



# REFRIGERATOR COMPACT K 220 RG 2W



SERIES: COMPACT  
ITEM NO.: 962200441



Temperature range  
+2° / +12°C

COMPACT K 220 models not only comply with the EU Ecodesign labelling regulation, but ranking in the energy efficiency class A+ these refrigerators offer the most energy efficient compact models in the marketplace.

Correct and uniform temperature throughout the cabinet is critically important for a food storage cabinet. GRAM COMPACT provides this with a unique ventilated air distribution system and a robust refrigeration system with sufficient refrigeration capacity.

COMPACT K 220 is approved to endure up to 30°C ambient temperature (Climate class 4). It further offers low heat emission with minimal compressor running time.

Compact 220 models are designed to fit under worktops in commercial workplaces. With their width of 59.5cm, depth of 64.2cm and height of just 83cm, these cabinets are ideal for building in beneath worktops. As a free-standing cabinet the undercounter COMPACT 220 provides extra work space with its "table top".

Materials Exterior: Stainless


Materials Interior: White polystyrene (PS) lining.

Gross volume: 128 ltr

- Air circulation system
- Right hand hinged reversible door
- Integrated full height door handle.
- 2 anti tilt white shelves
- Door lock for extra security
- Automatic defrost with re-evaporation of defrost water
- Low sound level of just 30.1 dB(A)
- Hydrocarbon refrigerant
- 10 year spare parts availability guaranteed

Refrigerant / GWP:  
R 600a / 3 - (0.033kg/CO<sub>2</sub> eq 0.1kg)


## MODEL DESIGNATION EXAMPLE:

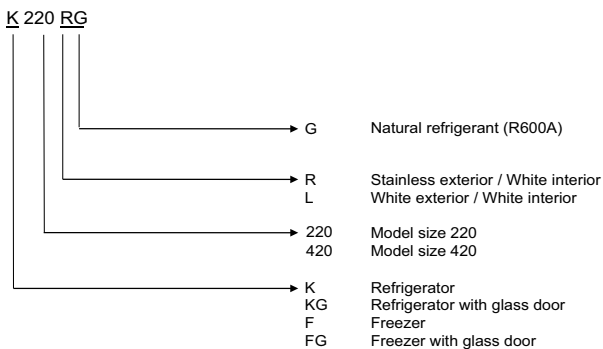

## Option codes:

- DL** Left hinged door
- C2** Castor 125 mm (only 420)
- L1** Leg H=100-135 mm (only 420)
- ..W** # of white nylon coated wire shelves

Item no.	Product name
96220	Compact K 210
96221	Compact KG 220
96222	Compact F 220
96226	Compact FG 220
96420	Compact K 420
96421	Compact KG 420
96422	Compact F 420
96423	Compact FG 420



MODEL	Volume, gross	Net usable volume	Connection	Connection load	Energy efficiency Class	Energy efficiency Index EEI	Annual energy consumption Ecodesign	Refrigeration capacity at -10°C	Climate class	Sound level	Insulation
<b>COMPACT K 220 RG 2W</b>	128 ltr	77 ltr	230 V, 50 Hz	62 Watt	A+	11.3	227 kWh	102 Watt	4	30.1 dB(A)	50 mm (cyclopentane)



**HOSHIZAKI**

**Hoshizaki Europe B.V.**  
Burgemeester Stramanweg 101,  
1101 AA Amsterdam  
The Netherlands


T: +31 (0)20 691 8499  
F: +31 (0)20 691 8768  
sales@hoshizaki.nl  
www.hoshizaki-europe.com

**Gram Commercial A/S**  
Aage Grams Vej 1  
6500 Vojens,  
Denmark

# REFRIGERATOR COMPACT K 220 RG 2W

Temperature range  
+2°/+12°C

**PACKAGED VIEW**

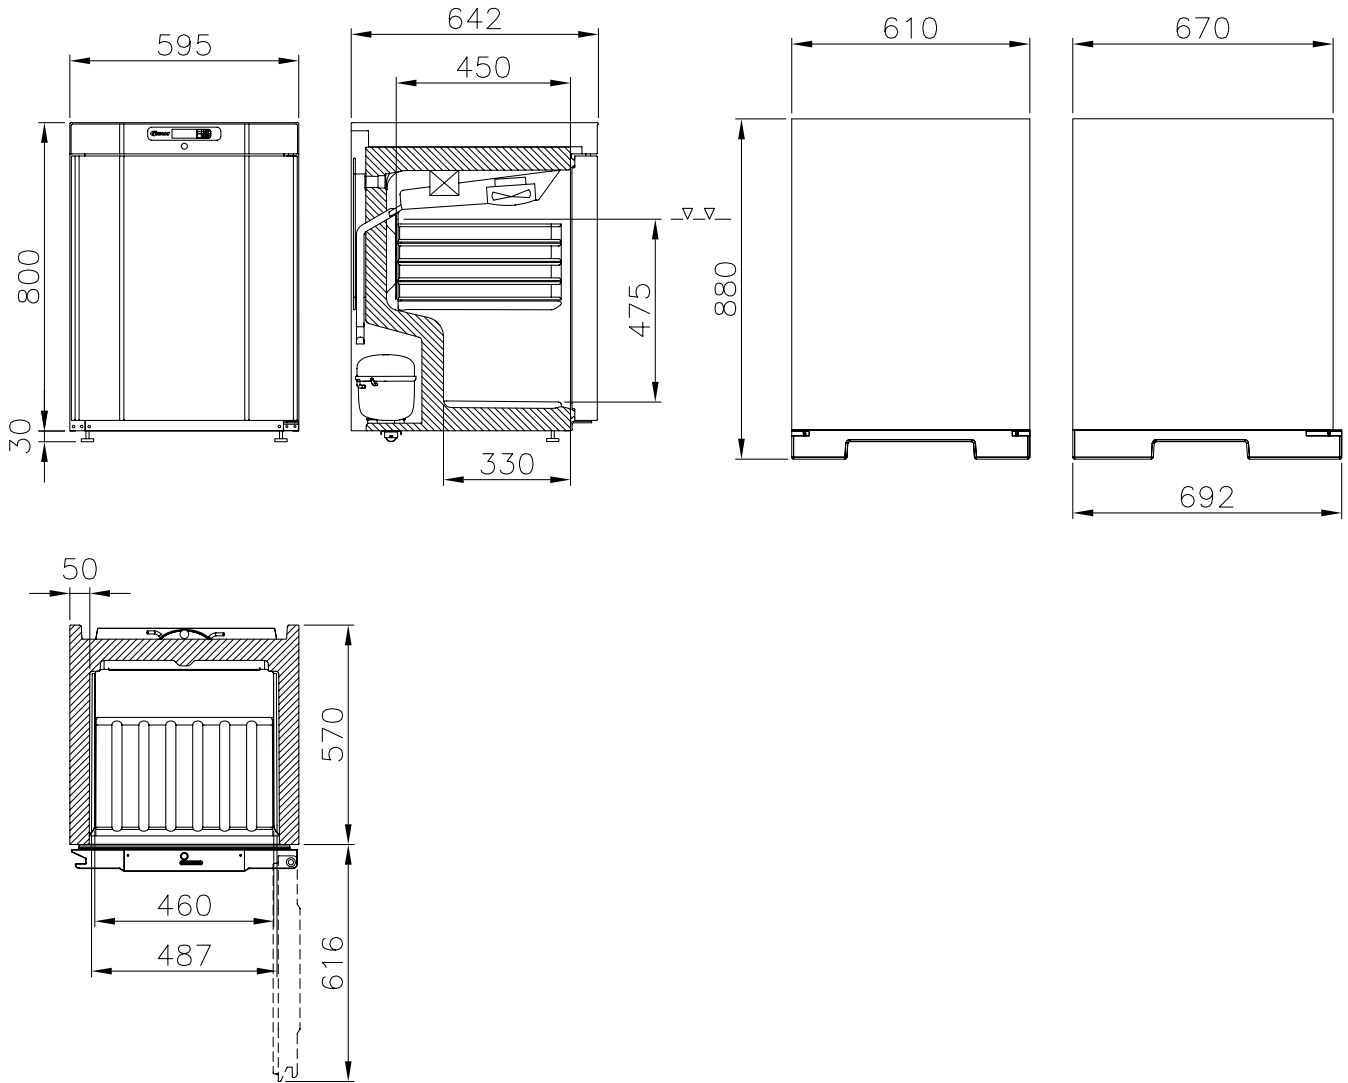

MODEL	Net dimensions W x D x H	Net weight	Packaged dimensions W x D x H	Packaged Weight	Packaged volume
<b>COMPACT K 220 RG 2W</b>	595 x 642 x 830 mm	41 kg	610 x 692 x 880 mm	44 kg	0.37 m <sup>3</sup>