

# NW 1408



## Modular Ice Machine 640 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW D 1408  
Dice 10 g  
W 22 x D 22 x H 22 mm



NW H 1408  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NW L 1408  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Remote condenser  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1  
230/60/1

### RECOMMENDED BINS

Head	Bins		kg
NW 1408	✓	<b>SB530</b>	243
	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406
	CBT52EAMCD	<b>SB1025</b>	478
	●	<b>UBH1100</b>	553
	●	<b>UBH1600</b>	812

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine 640 kg


# NW 1408



## Modular Ice Machine 640 kg

Item #:
Project:
Quantity:

Modular Ice Machine 640 kg

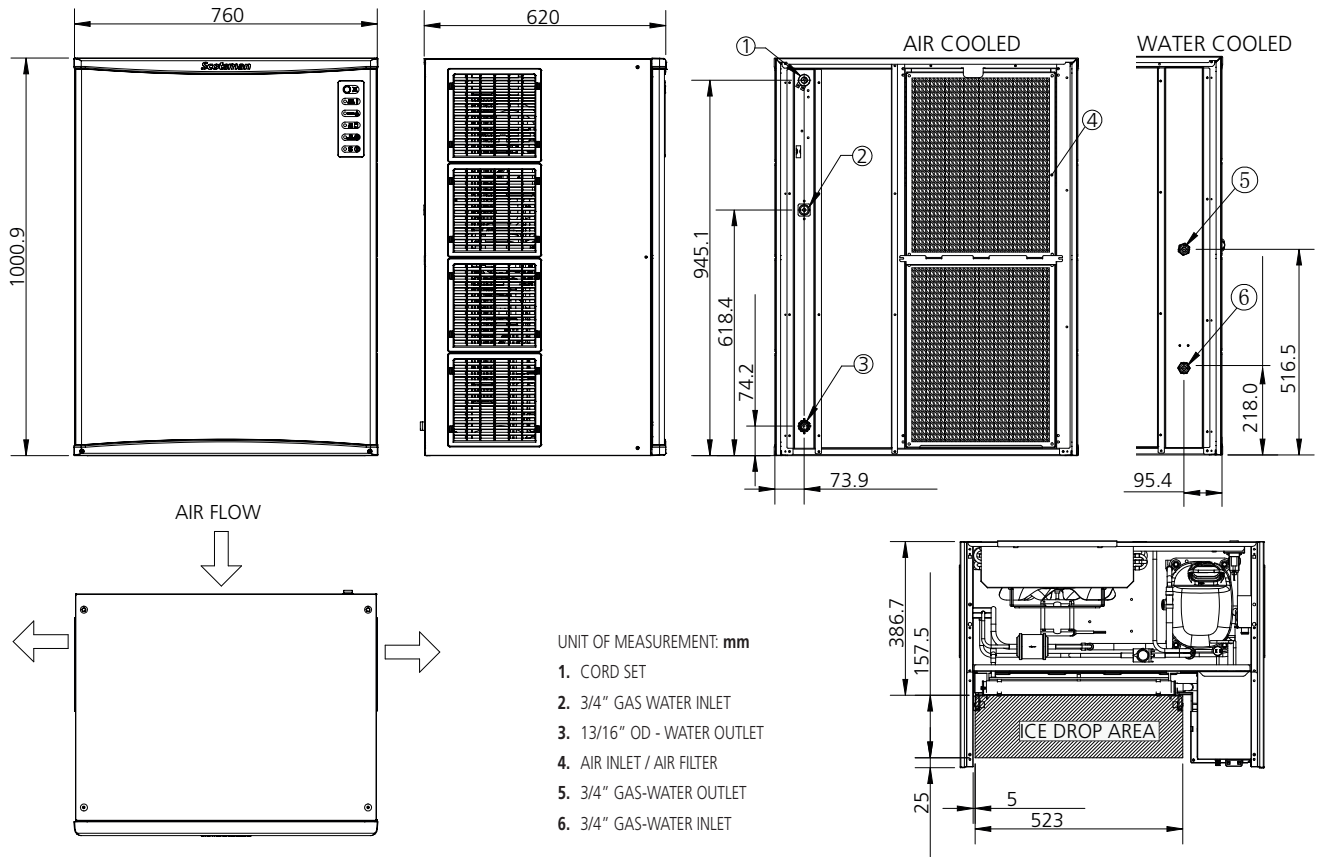

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	765 x 610 x 1000 mm	Carton (W x D x H)	830 x 690 x 1160 mm
Net weight	130 kg	Weight	145 kg

All data refer to R404A refrigerant models

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NWD 1408 AS	230/50/1	640	630	500	11.2	56.2	26.6	3365	10500	3 x 2.5	30
NWD 1408 WS	230/50/1	660	650	580	9.0	52.4	261.0	3365	10500	3 x 2.5	30
NWH 1408 AS	230/50/1	660	650	530	10.8	57.2	31.1	3365	10500	3 x 2.5	30
NWH 1408 ASR	230/50/1	680	660	500	10.8	54.0	29.8	3365	10500	3 x 2.5	30
NWH 1408 WS	230/50/1	660	660	590	9.3	54.6	292.6	3365	10500	3 x 2.5	30
NWL 1408 AS	230/50/1	620	600	510	10.4	52.8	27.6	3365	10500	3 x 2.5	30
NWL 1408 WS	230/50/1	620	630	560	8.8	49.4	282.8	3365	10500	3 x 2.5	30
NWH 1408 AS	230/60/1	660	641	480	11.2	54.0	32.6	3000	9442	3 x 2.5	30
NWH 1408 ASR	230/60/1	630	580	480	11.7	56.1	25.5	3000	9442	3 x 2.5	30

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions