VACUUM SEALER SU-310
Tabletop model. 10 m³/h. 320 mm.

FEATURES AND BENEFITS

✓ Powered by Busch.
✓ Vacuum controlled by sensor.
✓ Vacuum PLUS.
✓ LCD colour screen: all information at a glance.
✓ Backlit touch keyboard.
✓ Programmable: 25-programme memory. Blocking option.
✓ "Pause" button.
✓ Phased vacuum programme.
✓ Detection of the evaporation of liquids.
✓ Double seal.
✓ Cordless sealing bar.
✓ Progressive decompression.
✓ Vac-Norm ready with Automatic decompression.
✓ Stainless steel body and chamber. Deep-drawn chamber.
✓ Damped transparent lid of high durability polycarbonate.
✓ Dry-oil programme for drying the pump.
✓ Working hours counter for oil changes.
✓ Safety system with protection against vacuum failure.
✓ NSF-listed model.

SALES DESCRIPTION

320 mm. sealing bar.

10 m³/h Busch vacuum pump.

Vacuum controlled by sensor.

INCLUDES

✓ BUSCH pump.
✓ Sensor Controls.
✓ 25 programmable settings.
✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
✓ Soft air function.

✓ Clear methacrylate lid.
✓ "PAUSE" function.
✓ Liquid detection system.
✓ Dry oil cycle.
✓ NSF Approved.
✓ Filling plate.

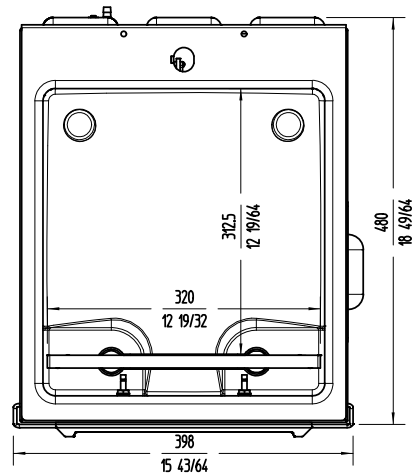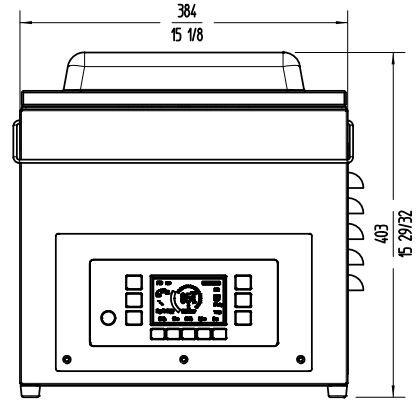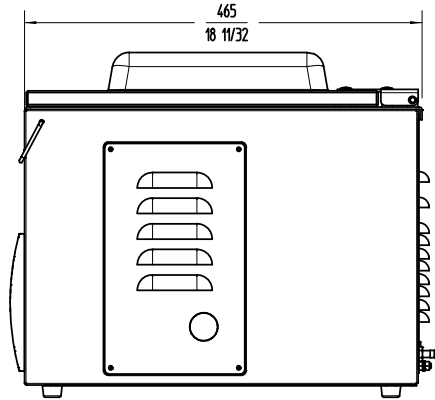| Project		Date	
Item		Qty	
Approved			

SPECIFICATIONS

Pump capacity: 10 m3/h

Bar length: 320 mm

Total loading: 370 W

Vacuum pressure (maximum): 2 mbar

Internal dimensions

✓ Width: 330 mm

✓ Depth: 360 mm

✓ Height: 155 mm

External dimensions (WxDxH)

✓ Width: 384 mm

✓ Depth: 465 mm

✓ Height: 403 mm

Net weight: 34 Kg

Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

AVAILABLE MODELS

1140730	Vacuum packing machine SU-310 230/50-60/1

* Ask for special versions availability

ACCESSORIES

❑ Filling plates

❑ Liquid insert plates

❑ Vac-norm external vacuum kits

❑ Vac-norm containers

❑ Smooth bags for vacuum packing

❑ CG2 Desktop printer for SU vacuum packing machines *

❑ Thermal labels for CG2 printer

Project	Date
Item	Qty
Approved	